


SHINNING
STAGE

UAPIC

www.uapic.co.id

LED UAPIC EDGE



We Provide the Best Services



Module Corner

Corner protection design is avoiding any hits for modules' corner, 100% protect LEDs.



Easy take out back cover

Directly take out back cover is easy to change within 5 sec.



Not Falling off Lock and Seamless Side Lock

The side locks are used to tighten up the cabinets while installing, to reduce the gaps between cabinets. It is good to present the seamless screen.



Seamless Side Lock

Brake lock helps the technician to finish installation in 1 person, save 50% assemble and disassemble time.

Why Choose Us

Design comes from a new era. New era will embark on the peak of stage. It adopts the corner protect also the brake lock and not falling side lock design, which is a milestone in the industry.

Call for Assistance

+021 6470-3201
+021 6470-3202

High Matt Black
Customized
Design



NOT FALLING OFF LOCK AND SEAMLESS SIDE LOCK



EASY TAKE OUT BACK COVER



MODULE CORNER



Rukan Multiguna Kemayoran Blok 5F.
JL. Rajawali Selatan Raya. C5 No. 2,
Pademangan Timur, Jakarta – Indonesia



info@matahariled.co.id





021 – 647032 – 01 / 02

SHINNING
STAGE

UAPIC




www.uapic.co.id

LED UAPIC EDGE



Model No.	KING-I2.6	KING-I2.98	KING-I3.91	KING-I4.81
Pixel pitch	2.604mm	2.98mm	3.91mm	4.81mm
Pixel Density	147475 pixel/m ²	12896 pixel/m ²	65410 pixel/m ²	43222 pixel/m ²
Brightness	1200 cd/m ²	1000 cd/m ²	1500 cd/m ²	1300 cd/m ²
Scan	1/32 scan	1/28 scan	1/16 scan	1/13 scan
Panel Dimension(W*H*D)	500x500x85mm/19.7"x19.7"x3.4"			
Panel Resolution	192×192 pixels	168×168 pixels	128×128 pixels	104×104pixels
Panel Weight	7.2KG			
Cabinet Material	Die casting aluminum			
Max power Consumption	800w/m ²			
Average power Consumption	270w/m ²			
Viewing Angle	H: 120° V:120°			
Refresh Rate	3840Hz			
Gray Scale	16bits			
IP Rating	IP43			
Operating Temperature	-20°C ~ +60 °C			
Lifetime	100,000hrs (about 11 years)			
Storage Temperature	-30°C ~ +70 °C			


Cabinet Details

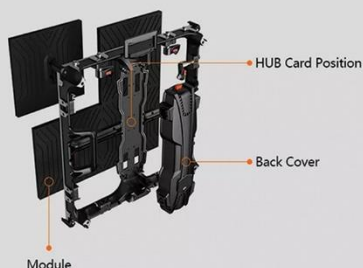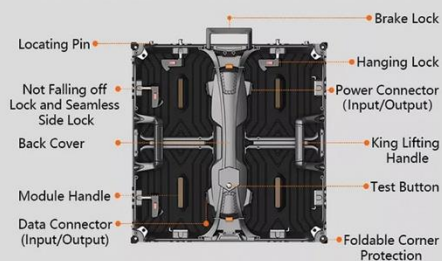


2 Kinds of Cabinet Designs



Side Lock



Curved Lock



Hanging Installation
(Max 10m height)

Stacking Installation



Rukan Multiguna Kemayoran Blok 5F.
JL. Rajawali Selatan Raya. C5 No. 2,
Pademangan Timur, Jakarta – Indonesia



info@matahariled.co.id



021 – 647032 – 01 / 02